


## STANDARD SECTION "B"

FLAT SLAB (STANDARD FLOOR/FIN RELATIONSHIP)


- \*\* SEE ALTERNATE SECTION "B" FOR OTHER FLOOR/FIN RELATIONSHIP
- \*\* MUST CHOOSE STANDARD OR ALTERNATE SECTION "B" OR PROVIDE ACTUAL JOB SITE FLOOR/FIN RELATIONSHIP

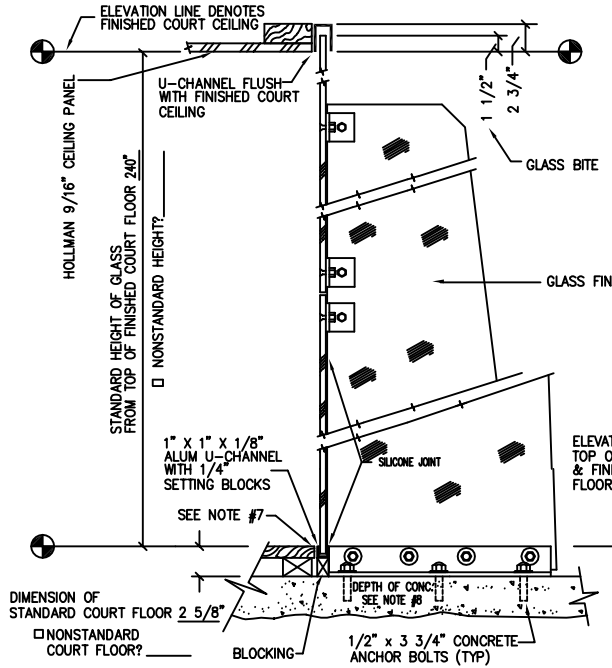

## ALTERNATE SECTION "B"


RECESSED SLAB (ALTERNATE FLOOR/FIN RELATIONSHIP)

- \*\* SEE STANDARD SECTION "B" FOR OTHER FLOOR/FIN RELATIONSHIP
- \*\* MUST CHOOSE STANDARD OR ALTERNATE SECTION "B" OR PROVIDE ACTUAL JOB SITE FLOOR/FIN RELATIONSHIP

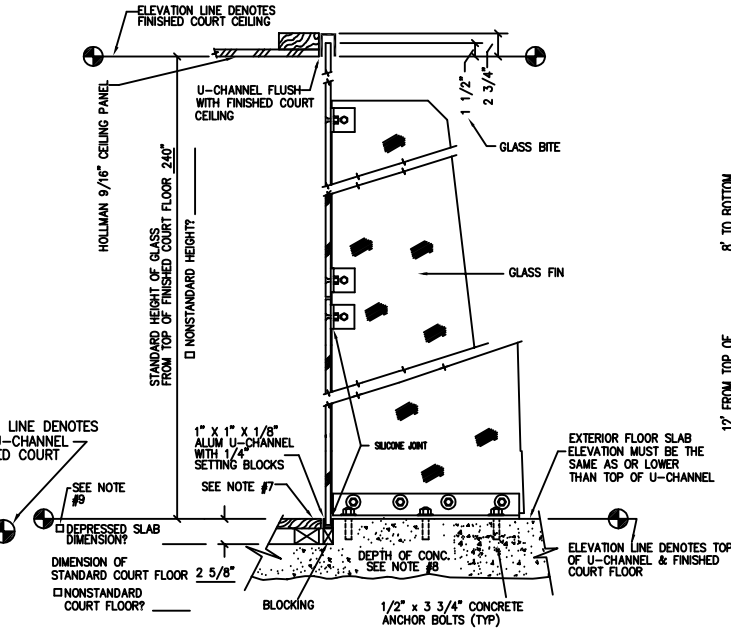

## COMPLETED GLASS WALL SYSTEM


Standard 40' wide x 20' high  
(fabricated using 8 panels and 7 fins)

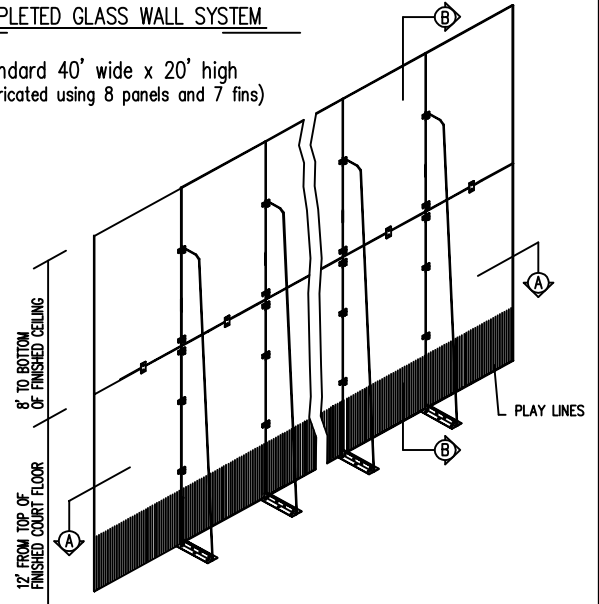

### GENERAL NOTES


UNLESS OTHERWISE NOTED:

1. ALL GLASS IS 1/2" CLEAR TEMPERED.
2. PLAY LINES ARE 1/8" WIDE, 1" ON CENTER AND 30" HIGH.
3. DOORS: N/A
4. ALL FASTENERS TO ATTACH ALUMINUM ANGLE/CHANNEL TO SUBSTRATE BY INSTALLER.
5. ALL GLASS CONNECTION FITTINGS ARE BLACK HIGH TENSILE POLYURETHANE.
6. ALTEPCO GLASS WALLS MEET AND/OR EXCEED THE BOCA REQUIREMENTS.
7. DIFFERENT TYPES OF COURT AND FLOOR SYSTEMS MAY REQUIRE EXPANSION SPACING BETWEEN GLASS WALL U-CHANNEL AND COURT OR FLOOR SYSTEM. CHECK WITH COURT AND FLOORING MANUFACTURERS.
8. CONCRETE DEPTH UNDER GLASS WALLS & POSTS MUST BE MINIMUM 4" AND CLEAR OF ALL REINFORCING ROD.
9. TYPICALLY FLOOR SLAB DEPRESSION IS SAME DIMENSION AS FINISHED COURT FLOOR.



DETAIL 1  
(ALTERNATE SIDE WALL CONFIGURATION)

### SECTION "A"

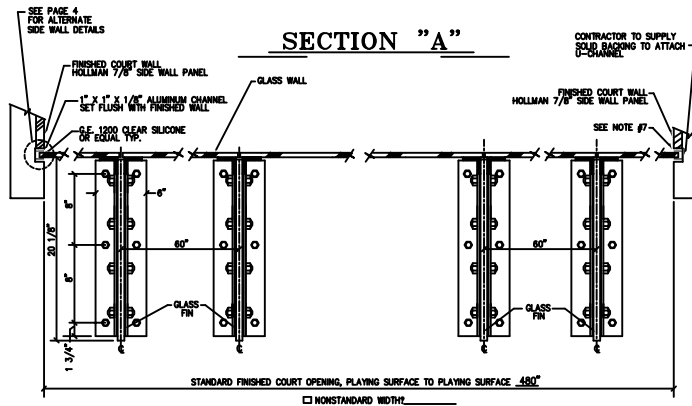

CHECK BOX IF DIMENSIONS OR ALTERNATES ARE NOT STANDARD.

NOTE: IT IS THE CLIENT'S RESPONSIBILITY TO INSURE THE DRAWING'S ACCURACY AND COMPLETENESS.

STANDARD 20' X 20' BACK WALL - BOTTOM LOADED		36" DOOR
REVISIONS:		
APPROVED BY:	DRAWN BY:	DATE:
PROJECT:	CHECKED BY:	SCALE:
CLIENT:	PROJECT NUMBER:	SHEET NUMBER: